


Neopren-HTD-Zahnriemen

HTD-Profil
endlos

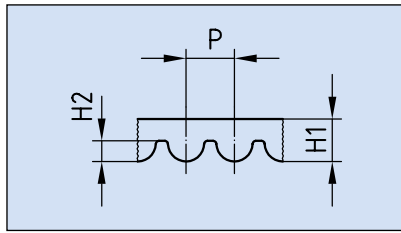

3M (Teilung = 3,0 mm)

Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm		
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)		
			06	09	15
90-3M	90,0	30	6	9	15
105-3M	105,0	35	6	9	15
129-3M	129,0	43	6	9	15
141-3M	141,0	47	6	9	15
144-3M	144,0	48	6	9	15
147-3M	147,0	49	6	9	15
150-3M	150,0	50	6	9	15
159-3M	159,0	53	6	9	15
168-3M	168,0	56	6	9	15
174-3M	174,0	58	6	9	15
177-3M	177,0	59	6	9	15
180-3M	180,0	60	6	9	15
186-3M	186,0	62	6	9	15
195-3M	195,0	65	6	9	15
201-3M	201,0	67	6	9	15
204-3M	204,0	68	6	9	15
210-3M	210,0	70	6	9	15
213-3M	213,0	71	6	9	15
225-3M	225,0	75	6	9	15
231-3M	231,0	77	6	9	15
240-3M	240,0	80	6	9	15
243-3M	243,0	81	6	9	15
246-3M	246,0	82	6	9	15
249-3M	249,0	83	6	9	15
252-3M	252,0	84	6	9	15
255-3M	255,0	85	6	9	15
261-3M	261,0	87	6	9	15
264-3M	264,0	88	6	9	15
267-3M	267,0	89	6	9	15
270-3M	270,0	90	6	9	15
276-3M	276,0	92	6	9	15
285-3M	285,0	95	6	9	15
288-3M	288,0	96	6	9	15
291-3M	291,0	97	6	9	15
297-3M	297,0	99	6	9	15
300-3M	300,0	100	6	9	15
312-3M	312,0	104	6	9	15
318-3M	318,0	106	6	9	15
327-3M	327,0	109	6	9	15
330-3M	330,0	110	6	9	15
333-3M	333,0	111	6	9	15
336-3M	336,0	112	6	9	15
339-3M	339,0	113	6	9	15
345-3M	345,0	115	6	9	15
357-3M	357,0	119	6	9	15

Typ	P mm	H2 mm	H1 mm
3M	3,0	1,15	2,4
5M	5,0	2,0	3,8
8M	8,0	3,2	5,4
14M	14,0	6,0	9,7

Bestellbeispiel: 105 - 3M | - 09
Artikel-Nr. | + Breite

Artikel-Nr. Ketten Fuchs	Wirk- länge in mm	Zähne- zahl	Standardbreiten in mm		
			(Bitte ausgewählte Breite vor Art.-Nr. setzen)		
			06	09	15
363-3M	363,0	121	6	9	15
375-3M	375,0	125	6	9	15
384-3M	384,0	128	6	9	15
390-3M	390,0	130	6	9	15
393-3M	393,0	131	6	9	15
405-3M	405,0	135	6	9	15
420-3M	420,0	140	6	9	15
432-3M	432,0	144	6	9	15
447-3M	447,0	149	6	9	15
474-3M	474,0	158	6	9	15
480-3M	480,0	160	6	9	15
486-3M	486,0	162	6	9	15
489-3M	489,0	163	6	9	15
495-3M	495,0	165	6	9	15
501-3M	501,0	167	6	9	15
510-3M	510,0	170	6	9	15
513-3M	513,0	171	6	9	15
522-3M	522,0	174	6	9	15
531-3M	531,0	177	6	9	15
537-3M	537,0	179	6	9	15
564-3M	564,0	188	6	9	15
570-3M	570,0	190	6	9	15
576-3M	576,0	192	6	9	15
579-3M	579,0	193	6	9	15
582-3M	582,0	194	6	9	15
597-3M	597,0	199	6	9	15
600-3M	600,0	200	6	9	15
633-3M	633,0	211	6	9	15
648-3M	648,0	216	6	9	15
669-3M	669,0	223	6	9	15
711-3M	711,0	237	6	9	15
735-3M	735,0	245	6	9	15
738-3M	738,0	246	6	9	15
756-3M	756,0	252	6	9	15
804-3M	804,0	268	6	9	15
882-3M	882,0	294	6	9	15
945-3M	945,0	315	6	9	15
1062-3M	1062,0	354	6	9	15
1125-3M	1125,0	375	6	9	15
1245-3M	1245,0	415	6	9	15
1263-3M	1263,0	421	6	9	15
1500-3M	1500,0	500	6	9	15
1530-3M	1530,0	510	6	9	15
1863-3M	1863,0	621	6	9	15

Riemengewicht = 2,75 x g/m x Breite in mm